


Privacy | <1% openness

Avila Daylight™

Privacy | 0% openness | Blackout

& Avila Twilight™

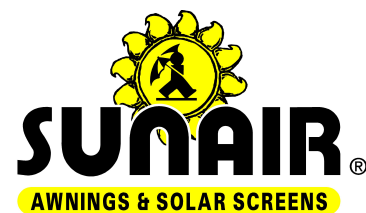

Specifications

Item Number	D63328
Product Category	Privacy
Openness Factor	<1%
Composition	100% Polyester
UV Blockage	Approximately 99%
Standard Packaging	Rolls of 30 ly (27 lm)
Width	118 in (300 cm)
Weight	6.20 oz/yd ² (210 g/m ²) ±10%
Thickness	0.012 in (0.31 mm) ±10%

Classifications

Fire Classifications

ASTM E84 (Class A)
California Technical Bulletin #117
ASTM E2180, ASTM G21
RoHS - Lead Free, GREENGUARD Gold
NRC 0.05, SAA 0.03

Avila Twilight™

Item Number	063328
Product Category	Privacy
Openness Factor	0% - Blackout
Composition	37.5% Polyester / 62.5% Acrylic
UV Blockage	Approximately 100%
Standard Packaging	Rolls of 30 ly (27 lm)
Width	118 in (300 cm)
Weight	12.24 oz/yd ² (415 g/m ²) ±10%
Thickness	0.018 in (0.46 mm) ±10%

ASTM E84 (Class B)
California Technical Bulletin #117
ASTM E2180
RoHS - Lead Free, GREENGUARD Gold
NRC 0.05, SAA 0.03

Warranty

Fabrication

5 Year Interior

10 Year Interior

Cutting: Cold, Ultrasonic Recommended | **Welding:** Heat Impulse, High Frequency. For exceptional weld bond strength, Mermet recommends our stocked adhesive film (item #103218).

We recommend testing all cutting and welding methods prior to use to confirm they meet your individual fabric specifications.

Avila Daylight™

ITEM	COLOR
000002	White
000017	Canvas
000020	Linen
000016	Chalk
000012	Frost

Avila Twilight™

ITEM	COLOR	SIDE*
000002	White	Streetside Roomside
000017	Canvas	Streetside Roomside
000020	Linen	Streetside Roomside
000016	Chalk	Streetside Roomside
000012	Frost	Streetside Roomside
000018	Ash	Streetside Roomside
000001	Pewter	Streetside Roomside
000050	Graphite	Streetside Roomside
000060	Black	Streetside Roomside

FABRIC					FABRIC + GLASS		ILLUMINANCE	
thermal Total Solar			optical		commercial	BLACKOUT%	GLOW%	
Rs %	As %	Ts %	Rv %	Tv %	SHGC			
59	5	36	65	35	0.38	0	100	
51	9	40	54	39	0.42	0	100	
44	22	34	45	31	0.45	0	100	
48	15	37	50	36	0.43	0	100	
45	22	33	46	31	0.44	0	100	

FABRIC					FABRIC + GLASS		ILLUMINANCE	
thermal Total Solar			optical		commercial	BLACKOUT%	GLOW%	
Rs %	As %	Ts %	Rv %	Tv %	SHGC			
68	32	0	74	0	0.25	99	1	
84	16	0	91	0	0.15	99	1	
69	31	0	74	0	0.25	94	6	
75	25	0	79	0	0.22	94	6	
68	32	0	74	0	0.25	99	1	
59	41	0	61	0	0.31	99	1	
68	32	0	74	0	0.25	98	2	
65	35	0	69	0	0.27	98	2	
69	31	0	76	0	0.24	99	1	
57	43	0	62	0	0.31	99	1	
69	31	0	76	0	0.24	100	0	
33	67	0	37	0	0.44	100	0	
67	33	0	74	0	0.25	100	0	
18	82	0	19	0	0.51	100	0	
68	32	0	76	0	0.25	100	0	
7	93	0	8	0	0.55	100	0	
68	32	0	74	0	0.25	100	0	
4	96	0	4	0	0.57	100	0	

*Roomside: identified by the fabric side; Streetside: identified by the coated side.

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. The front side of Avila is treated with DURAGUARD® Fabric Protector and in addition to DURAGUARD®, also treated with SANITIZED®. Therefore, Avila can be spot cleaned by gently blotting with a sponge or soft brush dipped in lukewarm soapy water using a mild detergent. The foam coating on the back side should not get wet. A dry chemical sponge or clean white pencil eraser can be used to remove small stains.

The fabric performance tests were conducted in accordance with ASTM E891 & ASTM E903-96: Solar Transmittance (Ts), Solar Reflectance (Rs), Solar Absorbance (As), Visible Reflectance (Rv), and Visible Transmission (Tv). Glass performance tests for Solar Heat Gain Coefficient (SHGC) were conducted using the Lawrence Berkeley National Laboratory Window 7.3 NFRC certified software. SHGC % improvement for commercial applications is based on a standard commercial glass makeup of Double Glazing 6 mm / 1/8" air / 6 mm with low E on surface #2. Results for SHGC were obtained using the center of glass. Acoustical performance was tested in accordance with ASTM C423-09a: NRC is Noise Reduction Coefficient, SAA is Sound Absorption Average. Blackout % is based on calculated luminosity using a 30s camera exposure with 100,000 incident lux. For up-to-date test results, performance specifications and larger samples, contact the Mermet Technical Department at: www.mermetusa.com.

Care & Handling


Mermet Corporation
5970 N. Main Street ■ Cowpens, SC 29330
Ph 1.866.902.9647 ■ info@mermetusa.com

mermetusa.com

Avila Twilight™

Privacy | 0% openness

Fire rated for residential applications

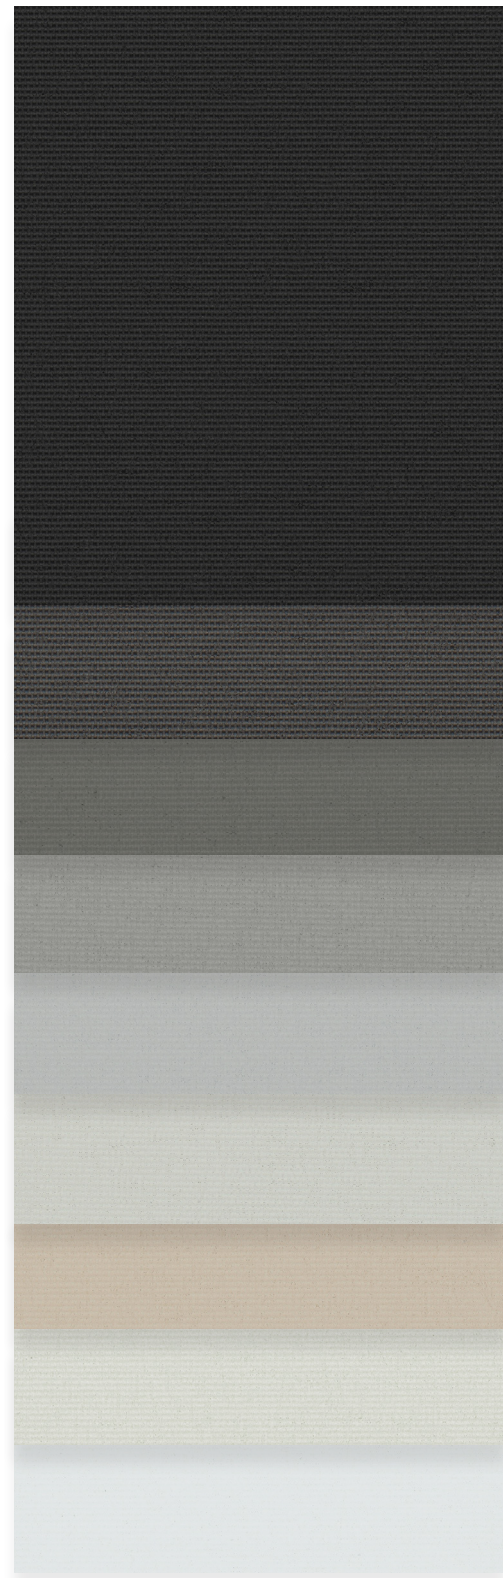

000060
Black

000050
Graphite

000001
Pewter

000018
Ash

000012
Frost

000016
Chalk

000020
Linen

000017
Canvas

000002
White

Avila Daylight™

Privacy | <1% openness

Fire rated for residential applications

A Translucent, Light-Filtering Fabric

Introducing Avila Daylight, offered in the same five lightest colors of Avila Twilight, provides both privacy and natural daylighting while maintaining the option to be paired with Avila Twilight.



000012
Frost

000016
Chalk

000020
Linen

000017
Canvas

000002
White



063328 | 000012
Avila Twilight
Frost

D63328 | 000012
Avila Daylight
Frost

0%

<1%