Model: LEVEL Pergola®

Application	Maximum Width	Maximum Projection	Options
Wall Mounted Commercial & Residential	5m /16' 5" Type 1 9m / 29' 6" Type 2 13m/42' 7" Type 3	6.5 meters / 21' 4" proj.	Undercover, LEDS, Heaters, Hood, Side Screens

PRODUCT FEATURES:

- Retractable fabric roof pergola.
- Standard wall mounted Pergola system suitable for small to medium sized patios.
- Integrated front gutter for water drainage.
- Multiple units can be mounted side by side to create larger width.
- All aluminum frame powder coated.
- Manually operated smaller sizes.
- Motorized all sizes and required on larger sizes.
- Optional hood system available.
- Ideal for adding drop down screens or zipper screens with square surfaces.
- Powered with a Somfy Motor.

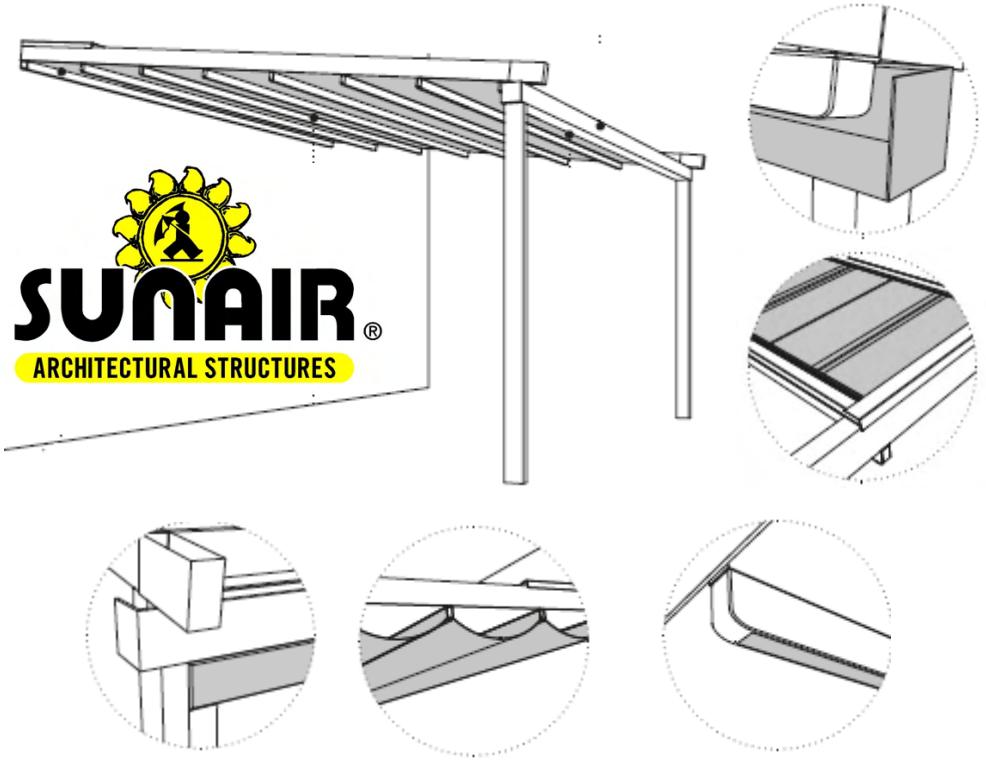

Revised 02/21/2020

LEVEL: Commercial Installations

LEVEL: Residential Installations

LEVEL Pergola® Technical information

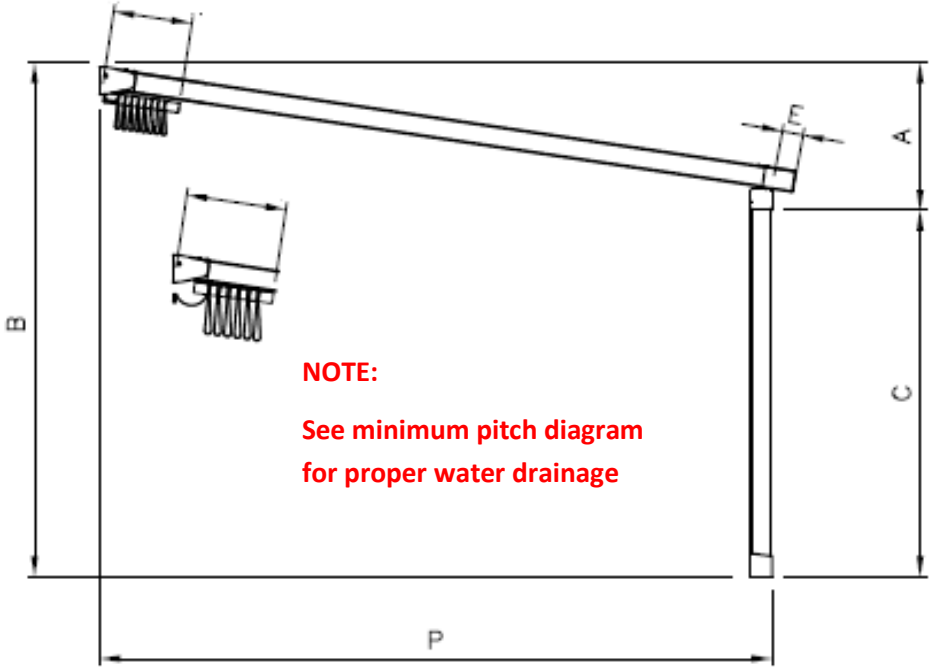

NOTE:

See minimum pitch diagram for proper water drainage

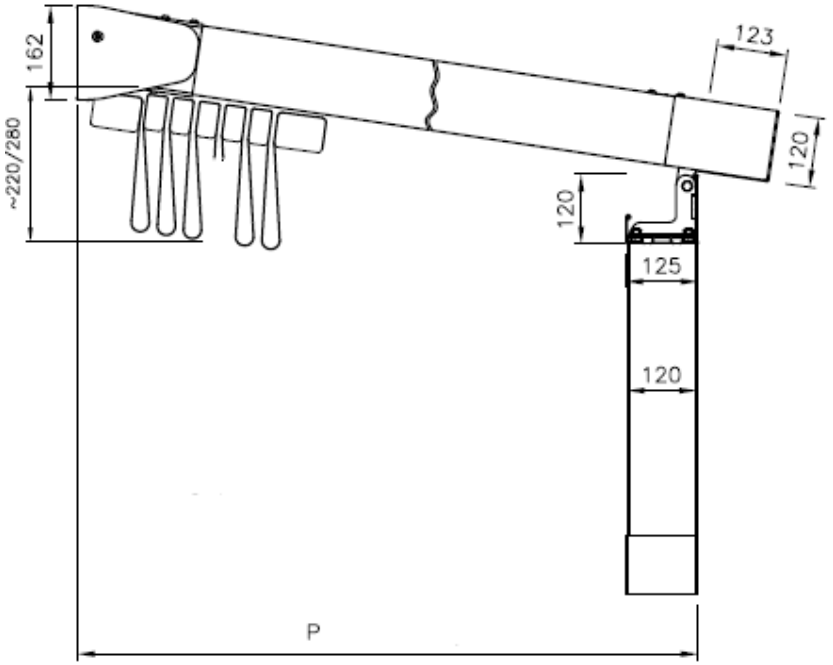

Dimensions:

A = Height of Slope

B = Height at top back

C = Post Height / Under gutter height

P = Actual Projection from wall

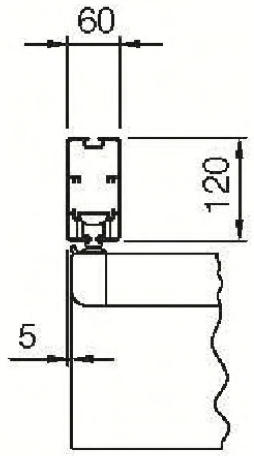

FRONT SECTION

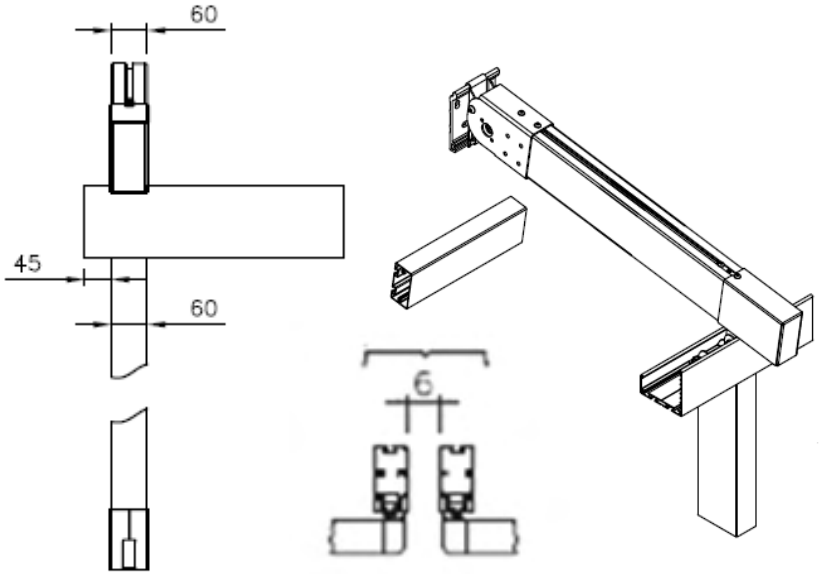

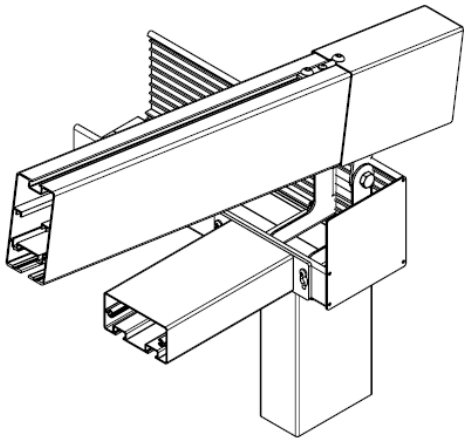

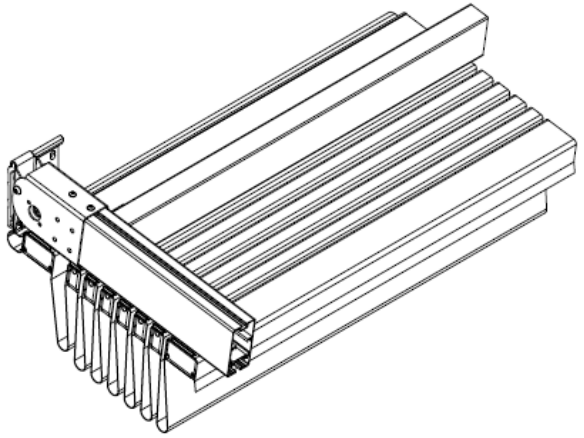

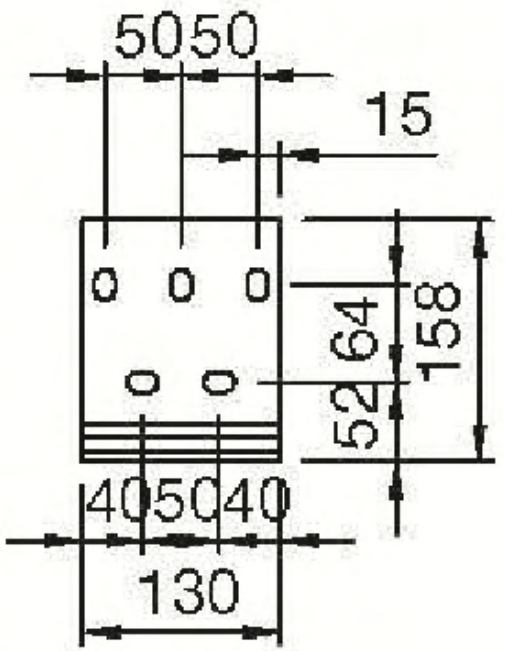

BRACKET PLATE FOR STD. WALL INSTALLATION

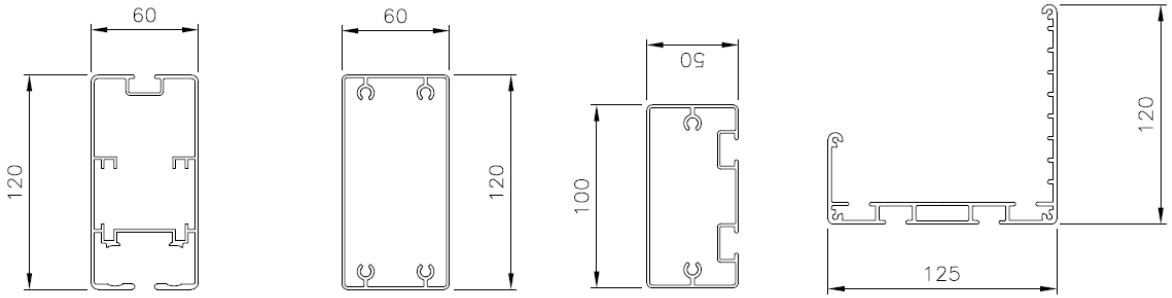

FOOT PLATE



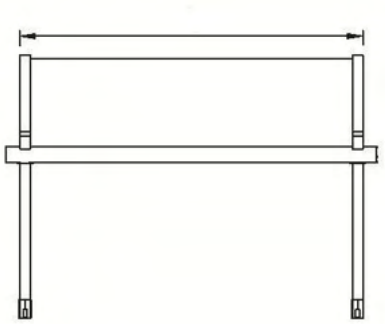

TYPE 1: Level system

L = from 8’ 1” to max 16’ 5” wide

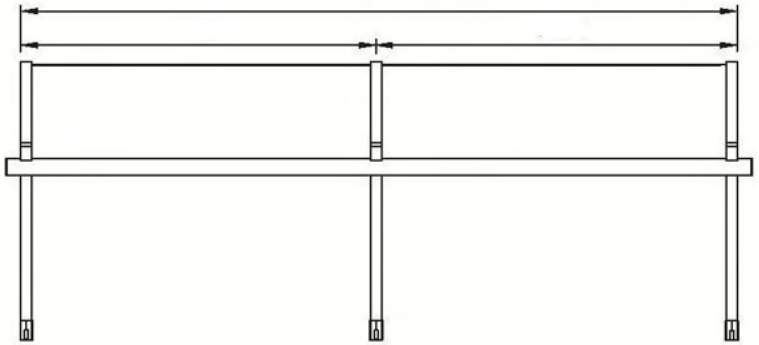

TYPE 2: Level system

2 spans (L from 14’ 8” to 29’ 6” max total

L1 & L2 from 6’ 6” to 14’ 8” wide

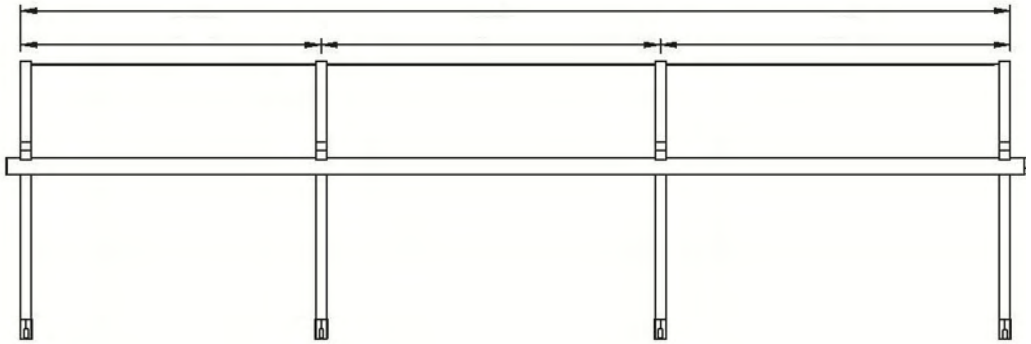

TYPE 3: Level system

3 spans (L from 27’ 10” to 42’ 6”)

L1, L2 & L3 from 6’ 6” to 14’ 1” wide

PERGOLA® LEVEL

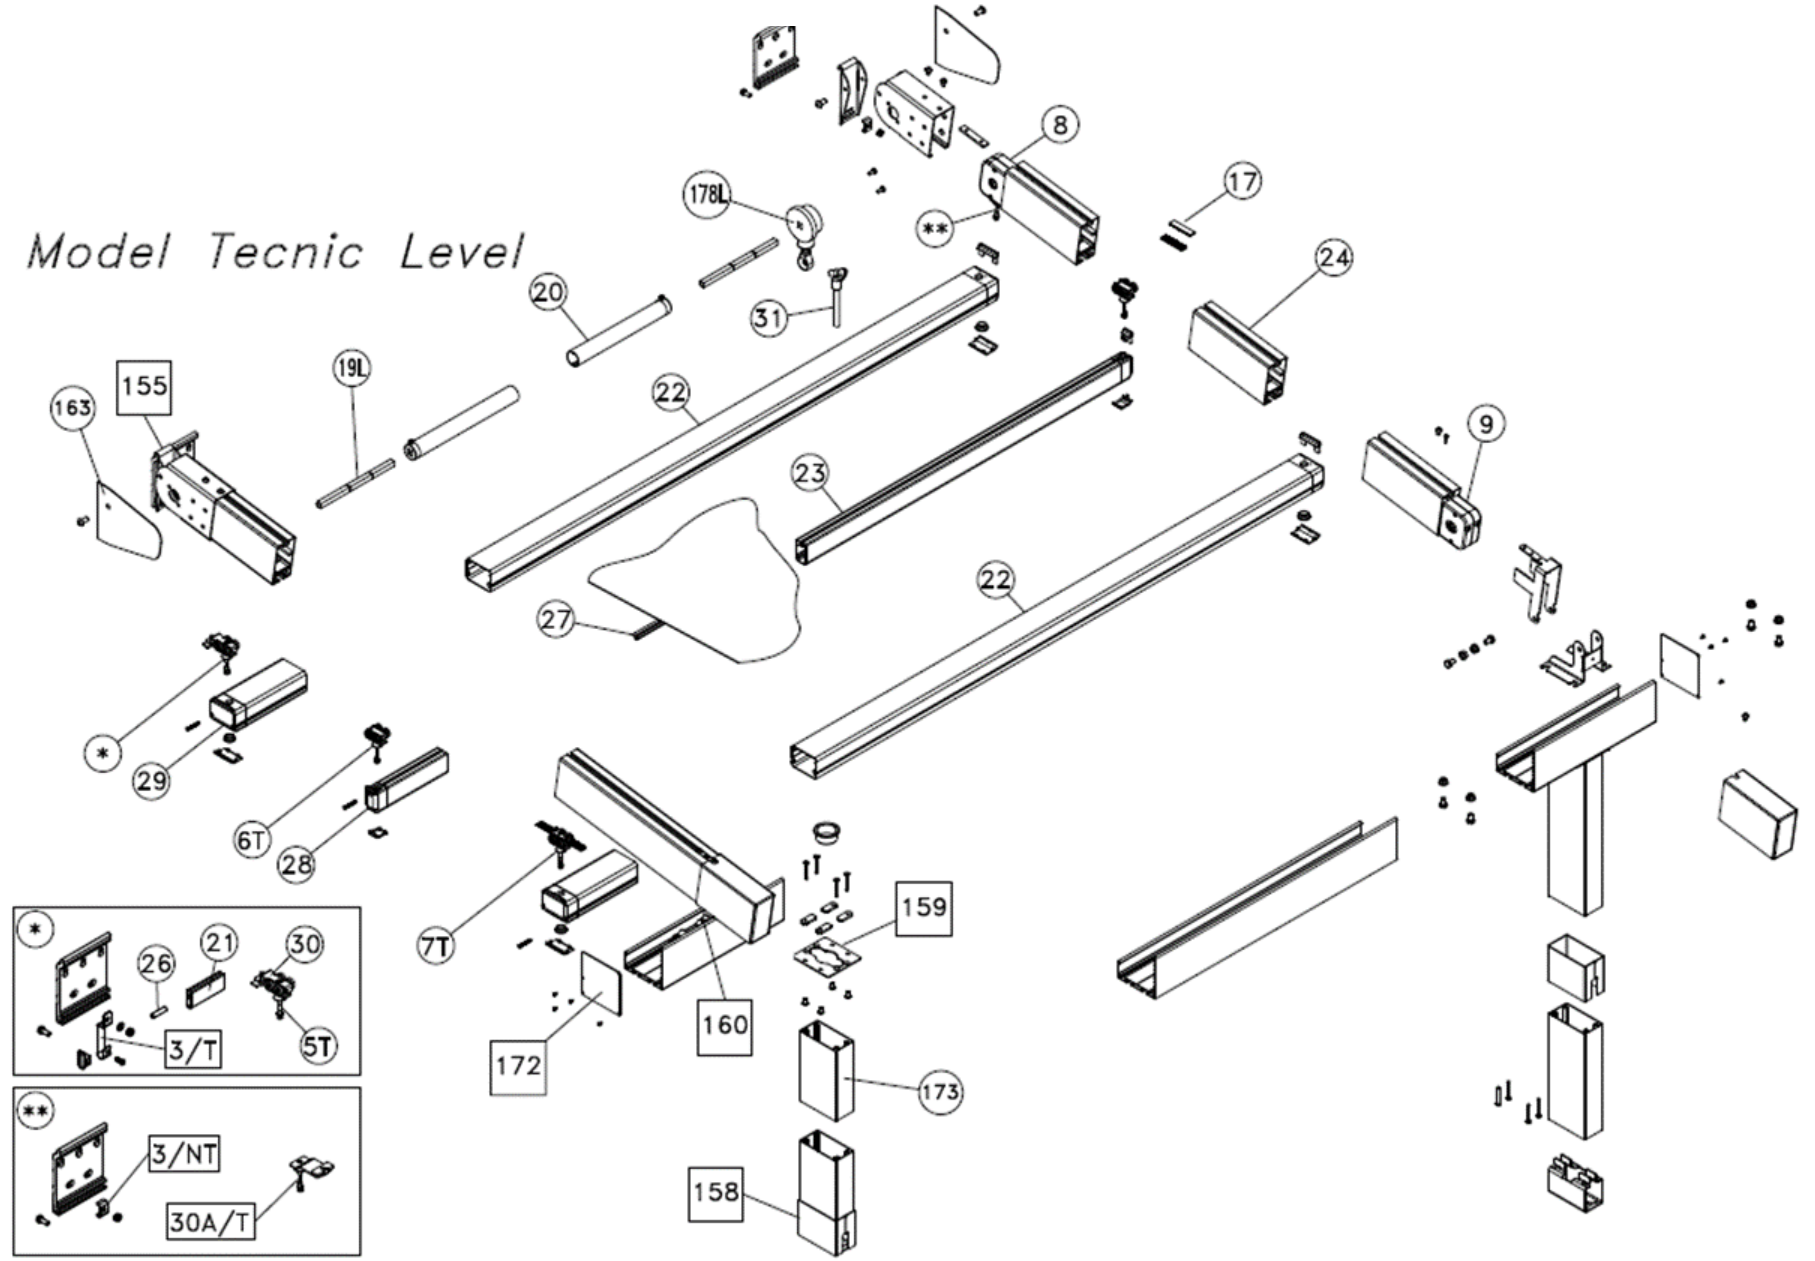

THE BELOW CHART REPRESENT THE IDEAL SLOPE ON THE "LEVEL" UNIT WITH TAUT FABRIC FOR PROPER WATER DRAINAGE

SEE OTHER OPTIONS FOR WATER DRAINAGE ON FLAT UNITS IN PRICELIST

LEVEL

PROJECTION "P"	DROP "A" IN CM/INCHES												NUMBER OF FABRIC FOLDS	FABRIC VOLUME RETRACTED W/POCKET
	2.5M 8'-2"		3.0M 9'-10"		3.5M 11'-5"		4.0M 13'-1"		4.5M 14'-9"		5.0M 16'-5"			
	CM	INCHES	CM	INCHES	CM	INCHES	CM	INCHES	CM	INCHES	CM	INCHES		
2.0M (6'-6")	44	18	48	19	52	21	54	22	55	22	55	22	3	18"
2.5M (8'-2")	49	20	54	22	59	24	62	25	63	25	63	25	4	19 3/4"
3.0M (9"-10")	54	22	60	24	66	26	69	28	70	28	70	28	5	21 3/4"
3.5M (11'-5")	59	24	66	26	73	29	76	30	78	31	78	31	6	23 1/2"
4.0M (13'-1")	63	25	71	28	79	32	83	33	85	34	85	34	7	25 1/4"
4.5M (14'-9")	68	27	77	31	86	34	91	36	93	37	93	37	8	27 1/8"
5.0M (16'-5")	73	29	83	33	93	37	98	39	100	40	100	40	9	29 1/8"
5.5M (18')	78	31	89	36	100	40	105	42	108	43	108	43	10	30 3/4"
6.0M (19'-8")	82	33	94	38	106	42	112	45	115	46	115	46	11	32 3/4"
6.5M (21'-4")	87	35	100	40	113	45	120	48	123	49	123	49	12	34 3/4"

THE RECOMMENDED HEIGHT "C" AT THE FRONT BAR IS 230CM OR 90.5"

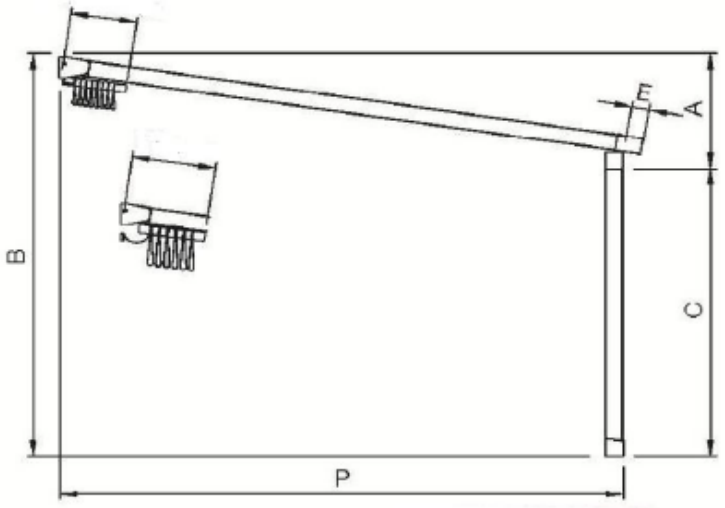

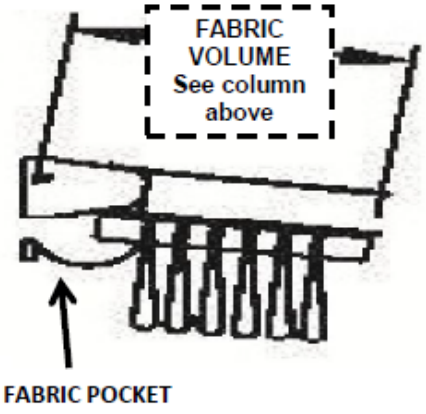

PRATIC PERGOLA® FEATURES AND PATENTS

NOTE: Features will depend on Pergola model chosen.

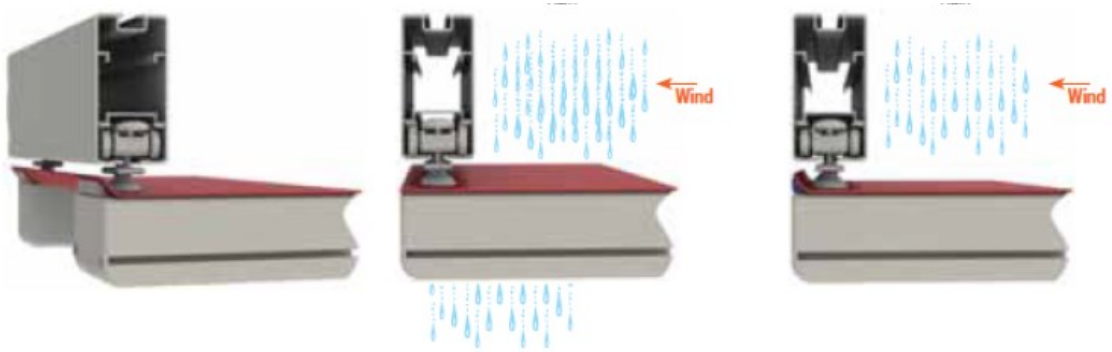

BREVETTO DEPOSITATO SALVAGOCCIA PRATIC

SUNAIR® ARCHITECTURAL STRUCTURES

The patented drip catcher keeps water from flowing off the sides when the wind is pushing water sideways. Instead the water will flow off the front or into the gutter (Traditional Pergola models only).

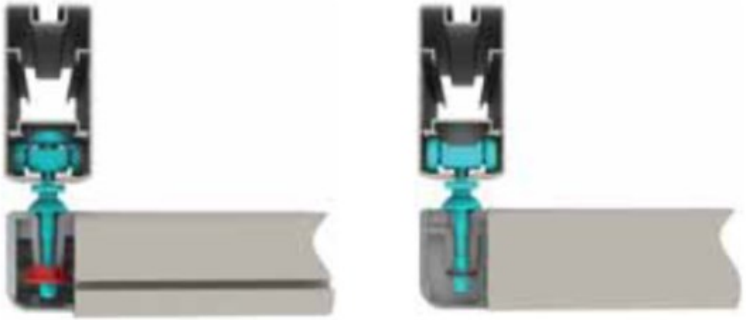

BREVETTO DEPOSITATO CLIC-SYSTEM PRATIC

BREVETTO DEPOSITATO SAFETY BOX PRATIC

The patented click system allows for easy and safe installation of the fabric and fabric ribs to the frame carriages using an easy click and lock system. This patented safety box for the motor installs on the frame with an extra mounting profile. This feature keeps the fabric perfectly straight even in temperature variations. The device makes operating easy and quieter and also stops the motor from operating in case of excessive force. The box is ideally suited for Somfy RTS Altus motors with remote controls (Traditional Pergola models only).

somfy.
It can be integrated with Somfy automated devices.

STANDARD FRAME COLORS FOR ALL PERGOLA MODELS:

NOTE: Optional for OPERA, VISION and BRERA is to have Structure and louvers in two different colors.

WHITE Gloss
Ral 9010

WHITE SAND
Coarse Ral 9016

IVORY SAND
Ral 1013 Coarse

IVORY / SEMI Gloss Ral 1013

GREY SAND
Gloss Ral 9006

BRIGHT ALUM
Matt Ral 9006

CORTEN
Coarse

IRON GREY
Coarse

OPTIONAL



FULL RAL COLOR RANGE / EXTRA COST

NOTE: These eight (8) colors are “super durables” which offer better durability compared with standard polyesters powders.

SUNAIR®
ARCHITECTURAL STRUCTURES

NOTE: *ACTUAL FRAME COLOR MAY VARY FROM DIGITAL IMAGES*

OPTIONAL FRAME COLORS FOR THESE PERGOLA MODELS:

Level, Mito, Tecnic & Tecnic One



MOCHA

Semi Gloss



GREY Gloss

Ral 7040



TAUPE Gloss



BROWN Gloss



BRONZE

Coarse

BLACK Gloss

Ral 9005



GREEN Gloss

Ral 6005

DESERT SAND /
IVORY Gloss

SUNAIR®
ARCHITECTURAL STRUCTURES

NOTE: All these colors except Green Ral 6005 and Desert Sand / Ivory are “super durables” which offer better durability compared with standard polyesters powders.

NOTE: *ACTUAL FRAME COLOR MAY VARY FROM DIGITAL IMAGES*

STANDARD PERGOLA FABRIC COLORS

602 FLEX LIGHT CLASSIC / *OPAQUE COLORS*

602N-8503 / 8103

602N-50020

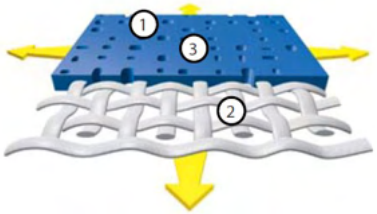

The Precontraint 602 fabric from Ferrari offers excellent dimensional stability with minimal stretching and exceptional dirt resistance thanks to a PVDF topcoat on both sides. The fabric is therefore perfect for use on retractable Pergola® roof awnings. The fabric is 22.1 oz/sq yard with a Glossy finish. The two standard opaque colors above are the most commonly used and is standard on all Pergola® awnings. The two above colors are opaque and do not allow light to go through the fabric. The 602 is also available standard in the 10 each translucent colors below allowing some light to go though. Fabrics are Fire Retardant and certificate is available. *Note: Translucent 602 colors below are only available on Pergola models made by Sunair® in Jessup, MD (USA made models).*

OPTIONAL 602 FLEX LIGHT CLASSIC / *TRANSLUCENT COLORS*

602N-8100

602N-8341

602N-8861

602N-1071

602N-1070

602N-1060

602N-1065

602N-1055

602N-1051

602N-1075

OPTIONAL PERGOLA & SCREEN FABRIC COLORS

502 PROOF SOLTIS / *OPAQUE SATIN FINISH COLORS*

The Precontraint 502 fabric from Ferrari also offers excellent dimensional stability with minimal stretching and exceptional dirt resistance thanks to a PVDF topcoat on both sides. The fabric is therefore perfect for use on retractable Pergola® roof awnings. The fabric is 16.8 oz/sq. yard with a satin finish. Fabrics are fire retardant and certificate is available.

502V2-8102C | 502V2-2171C | 502V2-2168C | 502V2-2167C | 502V2-8450C | 502V2-8341C | 502V2-8861C | 502V2-50265C | 502V2-2135C | 502V2-2141C

502V2-2138C | 502V2-2012C | 502V2-2148C | 502V2-2137C | 502V2-2158C | 502V2-50668C | 502V2-50669C | 502V2-50670C | 502V2-8056C | 502V2-2156C

502V2-2152C | 502V2-8255C | 502V2-2150C | 502V2-8204C | 502V2-2172C | 502V2-20185C | 502V2-50674C | 502V2-2166C | 502V2-50671C | 502V2-50675C

502V2-50672C | 502V2-50676C | 502V2-50270C | 502V2-50673C | 502V2-50677C | 502V2-2160C | 502V2-2161C | 502V2-1125C | 502V2-2157C | 502V2-8284C

satin finish

Serge Ferrari

Soltis Horizon 86

Serge Ferrari

14 % Open Screen Mesh

SUNAIR® ARCHITECTURAL STRUCTURES

Raso Screen

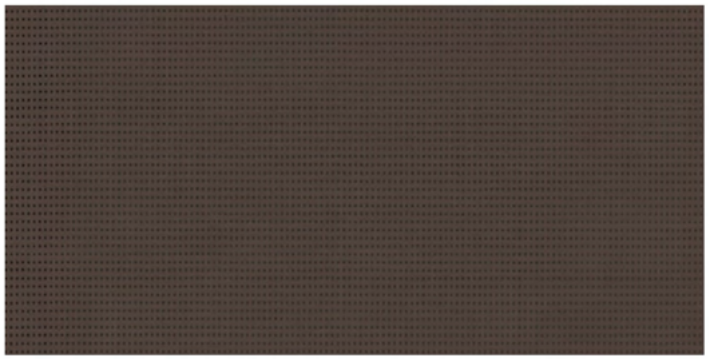

86-2043

Bronze

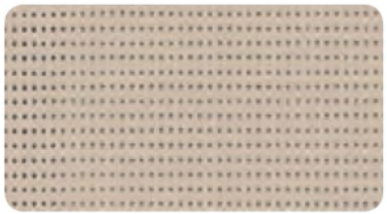

86 – 2135

Sandy Beige

86 – 2053

Black

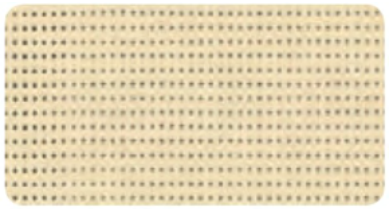

86 – 2175

Champagne

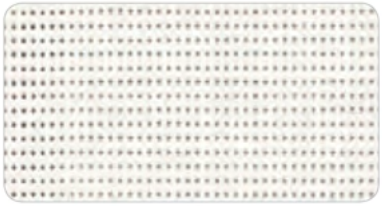

86 – 2044

White

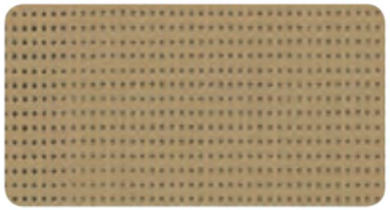

86 – 2012

Pepper

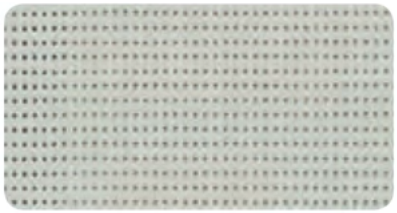

86 – 2171

Boulder

	Technical properties
Openess factor	14%
Weight	380 g/m² — 11.2 oz/sqyd
Thickness	0.45 mm — 450 microns
Width	177 cm - 267 cm — 69.7 in. - 105.1 in.

- Superior elongation and tear resistance
- No deformation during processing and use
- Superior aesthetic and mechanical durability
- Smooth finish easy to clean, space saving, easy rolling

MOTORIZATION & AUTOMATION

ALTUS®

Note:

Opera and Vision Louvered systems uses a different Linak motor and remote.

The Sunair PERGOLA® program features SOMFY RTS motor with an integrated radio receiver that allows you to operate the awning or screen by remote control with a wall mounted or hand held remote and by a smart phone device.

With a simple click of a button on your remote, the awning or shade will extend, retract , lower or raise automatically.

1 through 16 channel wall mounted and hand held remotes are available

RTS

somfy

OUR FABRIC ROOF PERGOLA® MOTORS

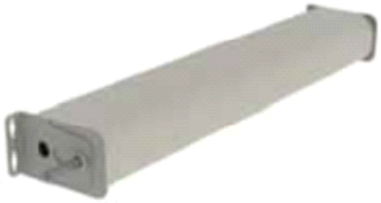

Sunair uses Somfy motors and controls for their Pergola awnings in the following range

Altus 535/550 Series: Nomo, Rialto , Type 1 & 2 standard Pergolas

Altus 550 Series: Brera P, S, and B Pergolas

Altus 660 Series: Type 3 Traditional Pergolas

Note: Opera and Vision uses a different "Linak" motor

<u>Note:</u> Motor type 535/550 used will depend on the size and projection of the unit.

	550	660
Torque	50 Nm	60 Nm (530 in. lbs.)
Nominal Voltage		120V / 60Hz
Rated Current	2.1A	2.5A
Speed	14 rpm	14 rpm

All Somfy Motors are UL and CSA Recognized

- All SOMFY motors are UL Recognized and can be found under the following file numbers:

E60495, E60888, E63714

Type of power cable

RTS
120V AC / 60Hz
3 conductor cable

white = neutral
black = hot
green = ground

Radio Technology Somfy
Radio Technology Somfy® (RTS) allows wireless radio control of motorized applications via the RTS family of controls.

MOTOR SAFETY BOX DIMENSIONS

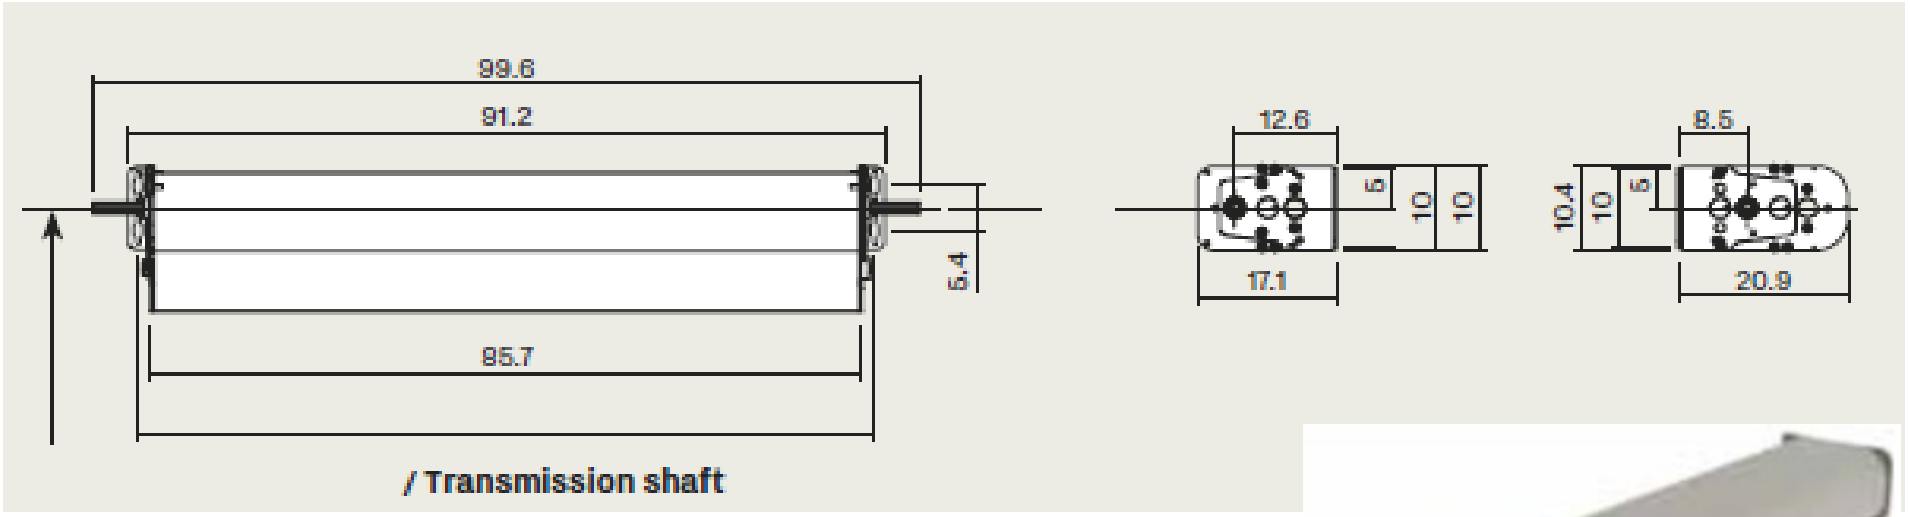

BREVETTO DEPOSITATO
SAFETY BOX
PRATIC

SUNAIR®
ARCHITECTURAL STRUCTURES

somfy.
It can be integrated with Somfy automated devices.

Screen motor for SC4500 zipper screens

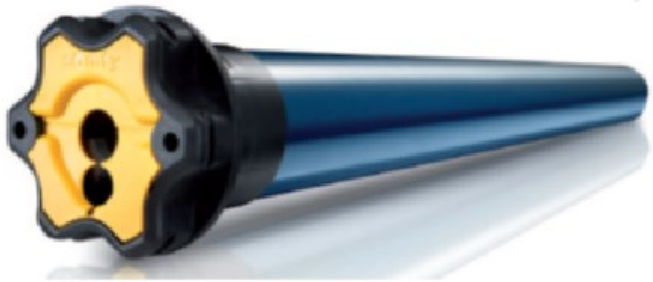

SUNAIR®
ARCHITECTURAL STRUCTURES

SCREEN MOTORS:

The screens are available with the 525 altus SOMFY motor and also the 525 Maestria Obstacle detection motor. These motors are tubular 110 volt motors and are integrated into the Raso roller tube like a normal screen motor. Electrical wiring for the Raso screens is integrated within the gutter system and posts and all electrical connections are pre-wired within the Pergola system to one central connection point for all the electrical options and motors. The Maestria obstacle detection motor prevents fabric damage resulting from screen bunching and slipping from the guides. The motor senses and distinguishes between an actual obstacle and wind, even wind gusts, so it doesn't stop unnecessarily, resulting in fewer service calls and end user peace of mind.

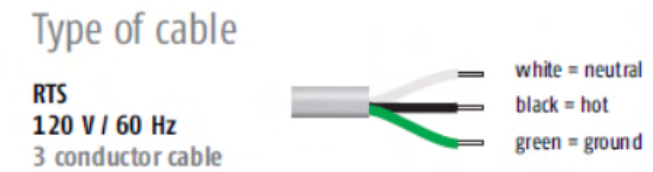

Performances	525A2
Torque	25 Nm
Nominal Voltage	
Rated Current	1.6A
Speed	20 rpm
Thermal Protection	
Radio Frequency	433.42 MHz

Note: It is recommended to use a multi channel Telis 4 remote to operate multiple screens. The Screen motors use the same RTS motor as all Pergola models except the Louvered Pergola systems. The Louvered OPERA & VISION systems use a separate TELECO remote control to operate the Louvered 24 volt motor and LED's.

SOLIRIS RTS 24V KIT

Sun & Wind Sensor

The Soliris RTS Sun and Wind Sensor automatically controls your RTS motorized products based on current weather conditions.

ONDEIS® WIREFREE

Sun & Rain Sensor

The Rain Sensor is a solar-powered combined rain and sun sensor compatible with Radio Technology Somfy® motorized exterior products, including awnings and screens.

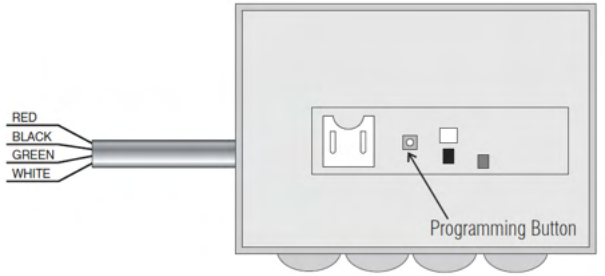

DRY CONTACT INPUT RTS TRANSMITTER

Dry Contact to RTS interface can be used to communicate between home automation or other third party systems like fire alarms to retract screens in an emergency. Can be interfaced with a physical switch.

The Somfy myLink™ is a simple device that turns your smartphone or tablet into a sophisticated remote control for motorized products featuring Radio Technology Somfy®, allowing you to operate them whether you're home or not. Combine all the benefits of Somfy's RTS hand-held remotes and timers in a convenient app.

somfy myLink™

OTHER PERGOLA OPTIONS:

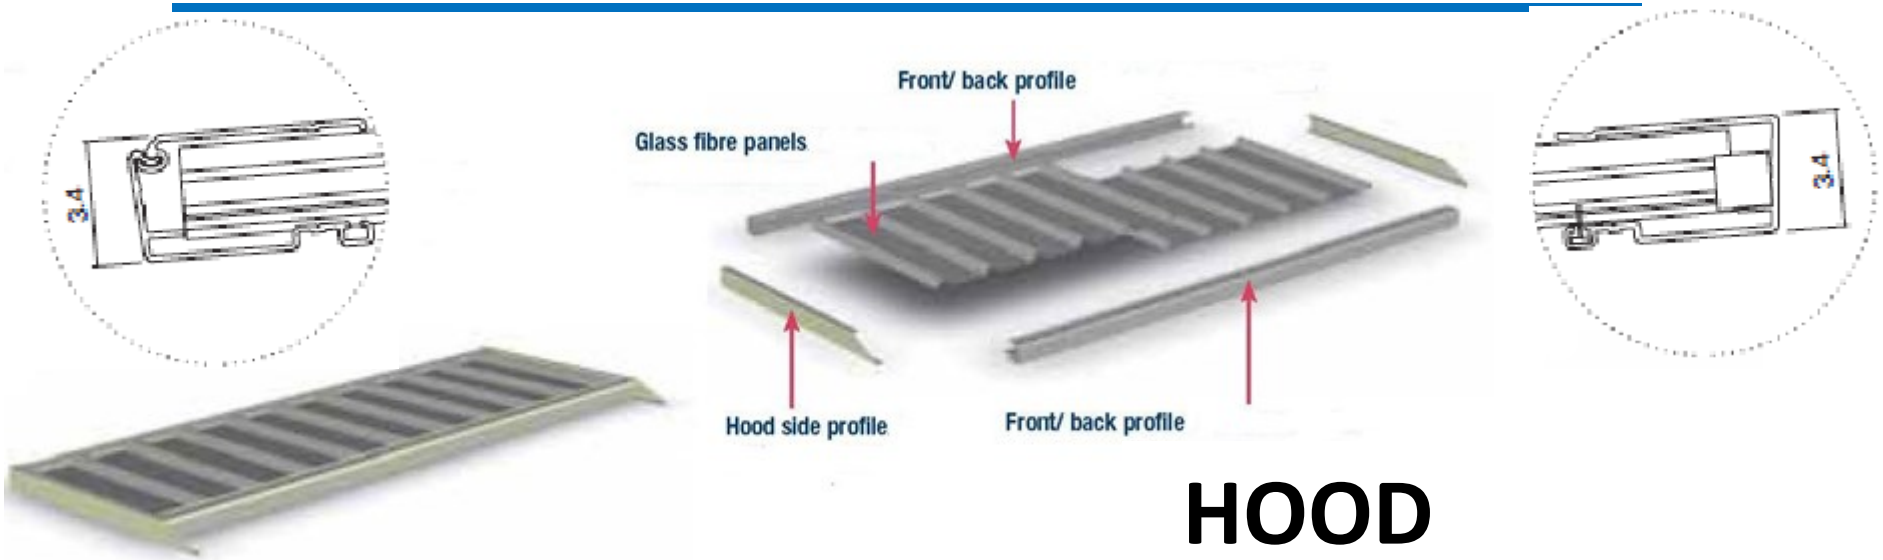

HOOD

HOOD: Is available standard with fiberglass panels with a metal frame. The metal frame color typically matches the awning frame. <u>Brown fiberglass panels are standard.</u> White fiberglass panels are also available standard but subject to stock availability.

<u>Optional:</u> Aluminum painted metal panels / painted to match the pergola awning frame color and metal hood pieces.

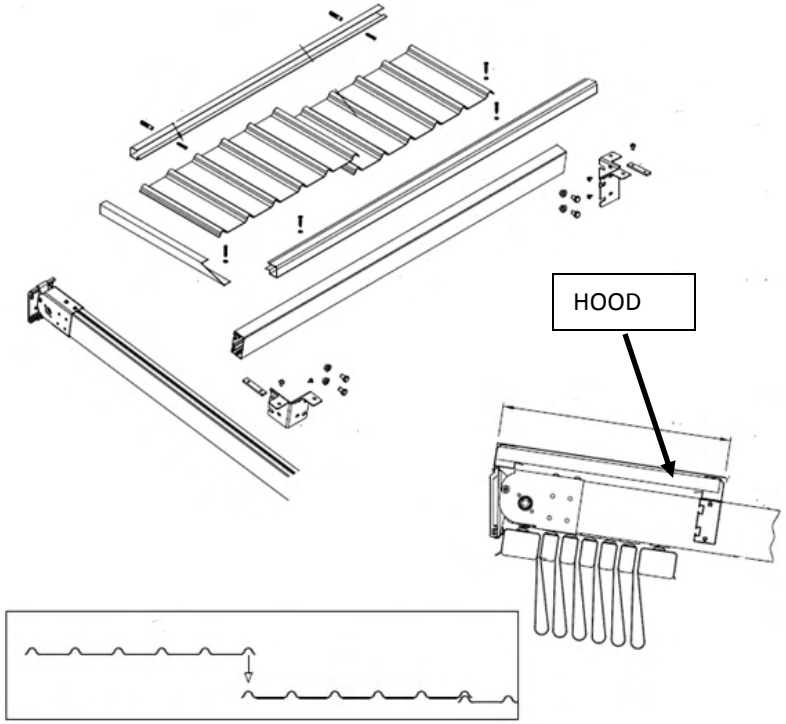

NOTE: Above panels are not available for ZEN, NOMO, RIALTO, OPERA and VISION Pergolas.

CAP BETWEEN WALL MOUNTED SYSTEMS

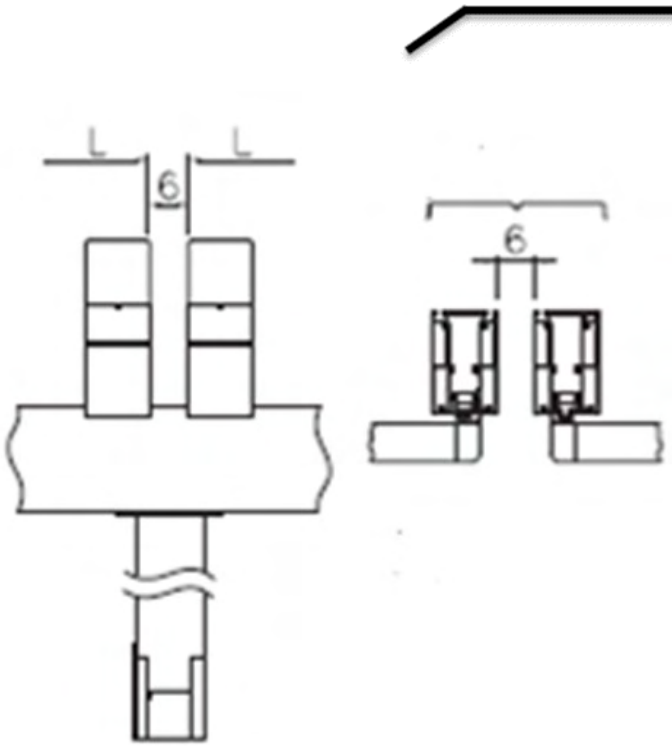

MITO & TECNIC ONE

30.5 cm / 12" wide weather cap.
Deduct 6 cm between guide rails. ie a three (3) cm deduction off each unit at split in center.

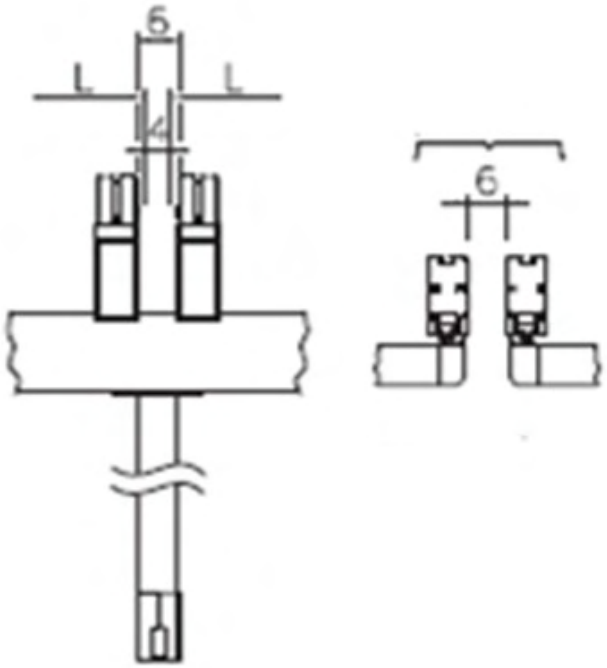

LEVEL / TECNIC

25 cm / 10" wide weather cap.
Deduct 6cm between guide rails / 4cm between L widths. ie a two (2) cm deduction off each units L dimension at split in center.

NOTE:
Caps available in 10ft / 3m sections. Powder coated to match the Pergola frame color.
Calculate number of sections needed to cover the entire guide / projection to the gutter.

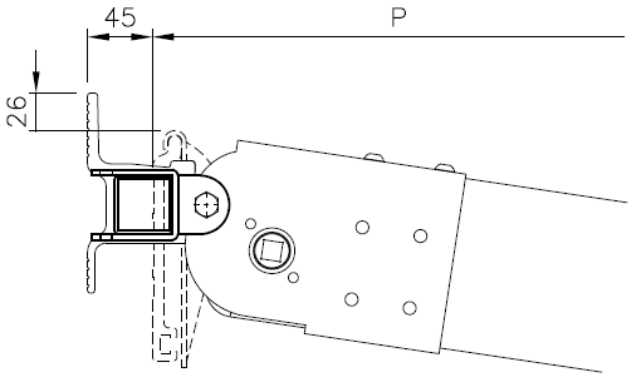

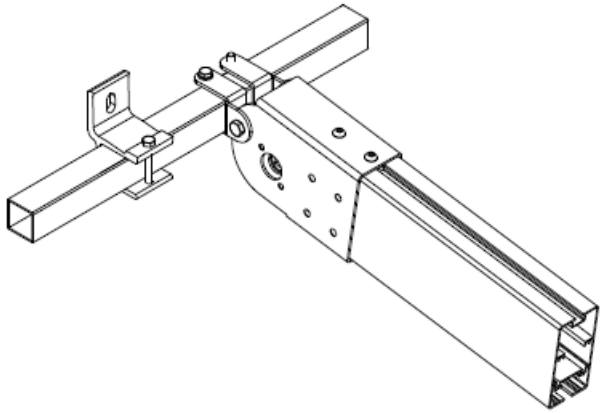

MOUNTING ON SUPPORT TUBE

Wall mounting the Level awning is possible using standard wall brackets and the 40 mm x 40 mm support tube. This support tube is the same as is commonly used for lateral arm awnings, using the same bracket system. The wall brackets can be positioned along the support tube to align with the wood or steel studs in the wall. Please inquire about additional cost for this upgrade.

Note: This option is NOT available with very larger sized units. Please inquire with office.

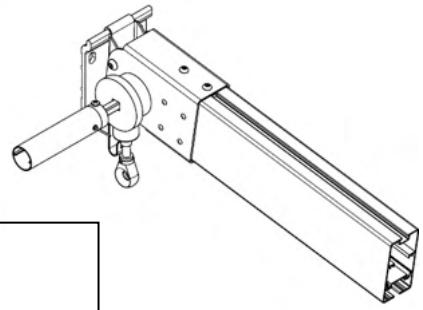



MANUAL UNITS GEAR MECHANISM

(Some models)

Only small TYPE 1 units may be manually operated up to a certain size (see below) Max size for any manual unit is 268 sq. ft. or 25 sq. mtr. Manual gear can be installed in two ways inside or outside the guide (please inquire with Sunair).

Note: Nomo, Rialto, Opera and Vision not available with manual operation.

CEILING MOUNTING <u>Optional:</u>

MITO, EVO, STIL, INFINITY

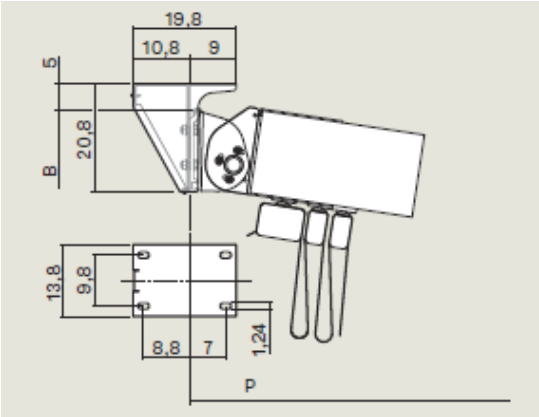

LEVEL

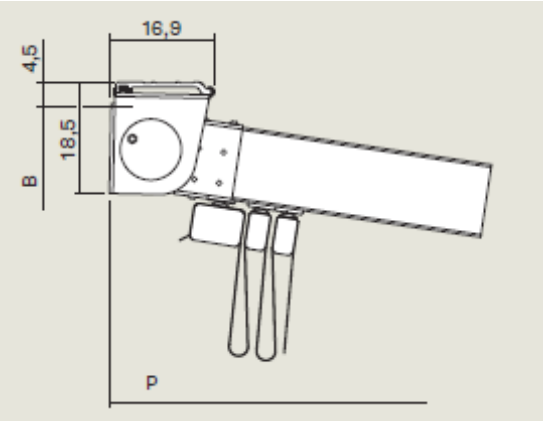

WOOD PLUS

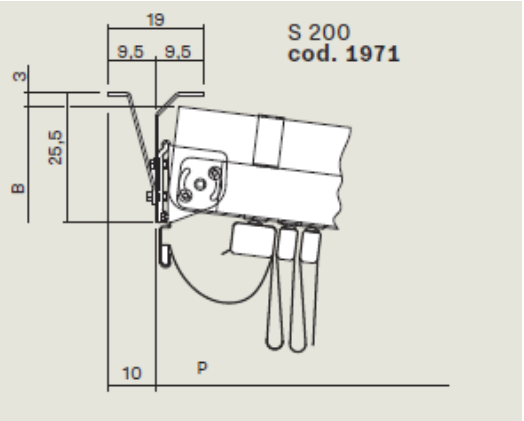

EASY FAST <u>Optional:</u>

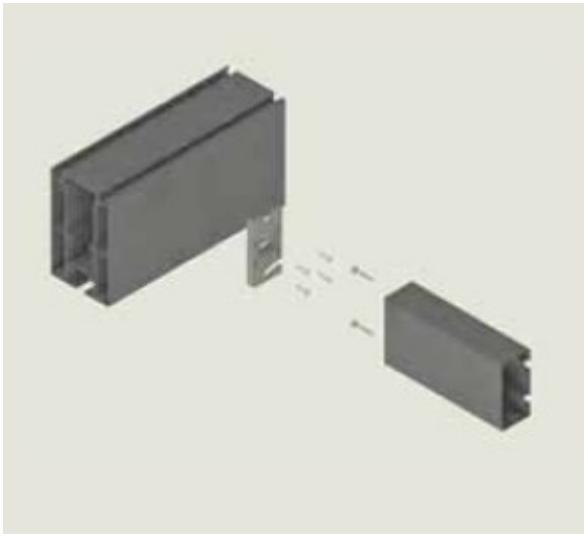

11 mm kit 5 x 10

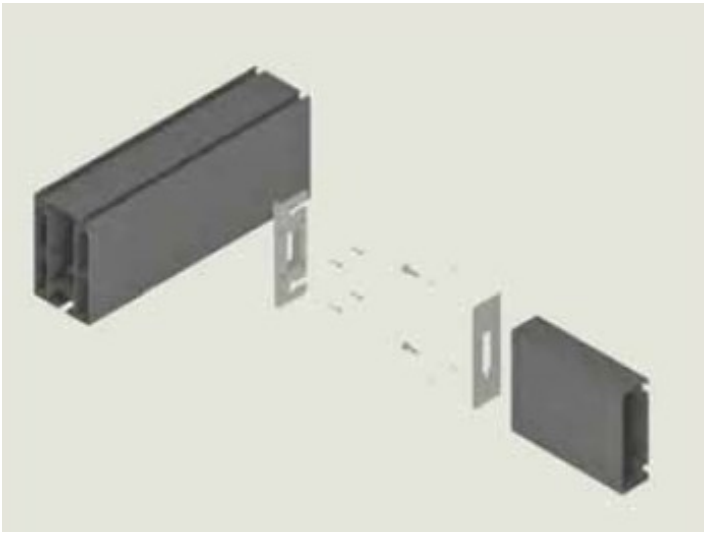

15 mm kit 5 x 16

The EASY FAST is an optional alternative way to mount the motor or hood crossbar.

It is also an easier way to add an additional cross bar later if needed.

SIDE STRUCTURES & POSTS

Add vertical and horizontal support beams and posts when adding rolling screens and side panels.

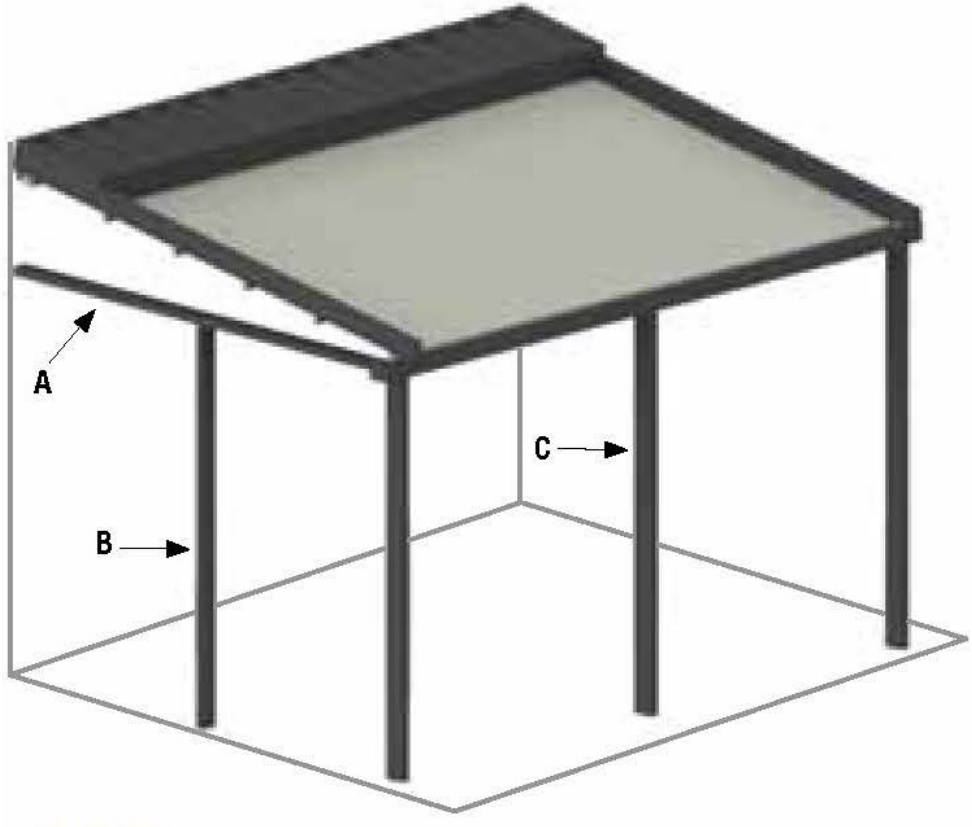

<u>POSTS B & C:</u> Additional side and front posts

<u>POST A</u>: Horizontal bar used to install screens and fabric end cover.

SIDE SCREN SC4500 ZIPPER SCREENS

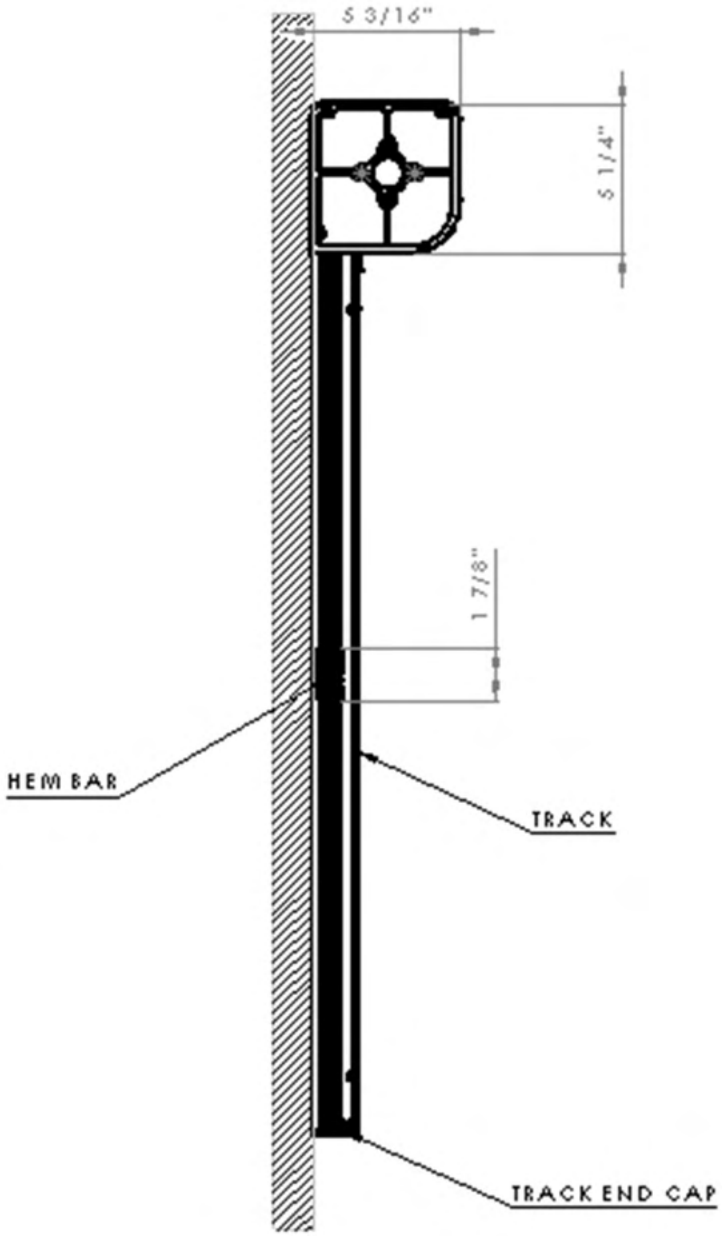

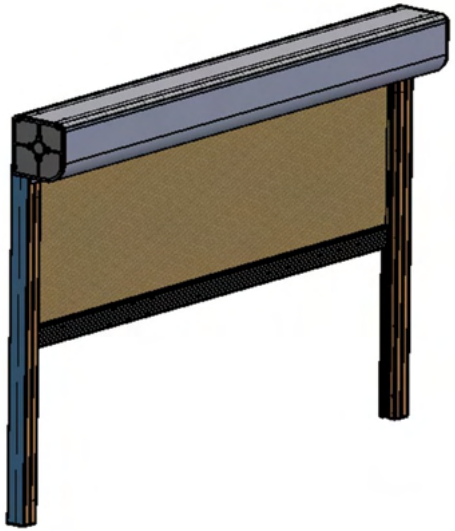

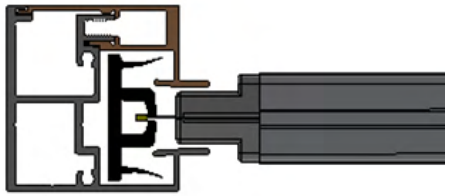

For further information please see the awning and screen manual and SV4500 Zipper screen technical manual.

Specialty shaped covers (Other Options)

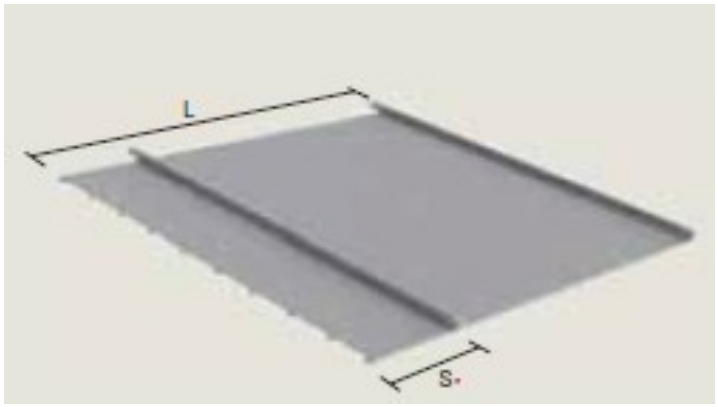

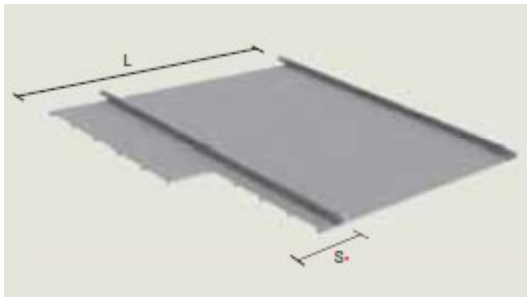

Overhang with gaps B:

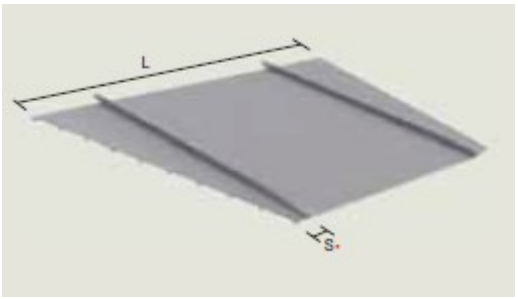

Triangular Overhang C:

***Tri-angular side Not available with**



Side Overhang A:

Minimum 10 cm

Maximum 100 cm

- **Recessed guides & Fabric rib overhangs**

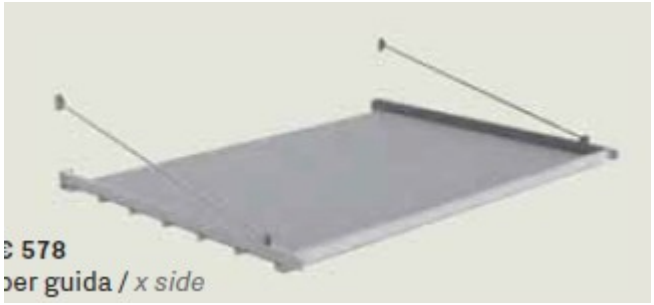

NOTE:
You must add an additional MOTOR BAR to the Pergola $$ cost at front to stabilize when using Tie Rods.

***Rib alignment in case two systems mounted next to each other with different projections .**

***With Tie rods max projection is 5m or 16' 5" projection. Must be bolted to structural wall**

*** Note: Engineering and availability may change without notice**

Optional: Structures to mount free standing

IF YOU WANT TO TAKE A TYPICAL "WALL MOUNTED" PERGOLA STRUCTURE AND MAKE IT FREE STANDING THERE ARE TWO OPTIONS BELOW. HOWEVER IT IS BEST TO USE THE NOMO, RIALTO, PHOENIX AND ZEN, WHICH ARE FREE STANDING MODELS WE OFFER.

“V” Cover water Drainage to Sides

FABRIC WATER DRAINAGE OPTIONS “D” “V” Alternating

OPTION D

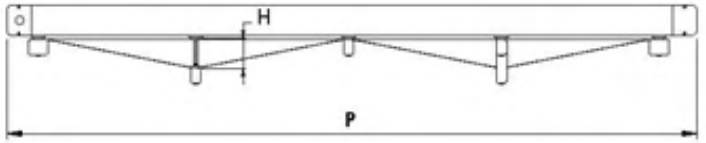

OPTION D: “V” Cut alternating panels for Type 1 Pergola® only. Max width is 5 meters x 9 m projection

FABRIC WATER DRAINAGE OPTIONS “E” “V” Cut Side

OPTION E

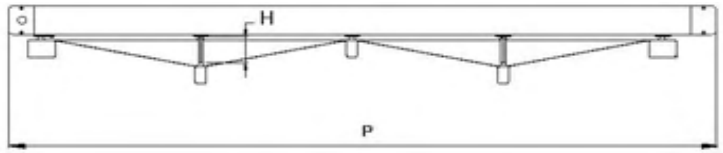

OPTION D: “V” Cut to one side only. For Type 1 Pergola® only. Max width 5 meter x 9 m projection.

FABRIC WATER DRAINAGE OPTIONS “F” “V” Cut Type 2

OPTION F

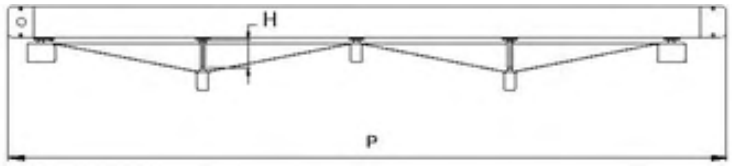

OPTION F: “V” Cut to both sides. For Type 2 Pergolas only. Max width 7 meters x 9 m projection

SLACK FABRIC “A” OPTION FOR SUN PROTECTION ONLY

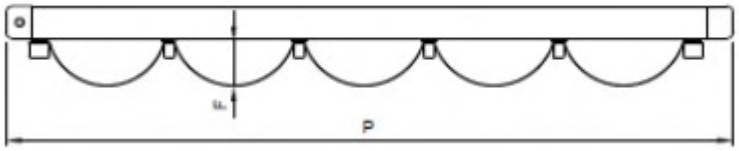

You can also choose slack fabric option “A” on each panel. <u>This option is for sun protection only and will not offer any water drainage</u>. Acrylic fabric is available with this option.

Loose Cover with water Drainage to Sides

OPTION B & C

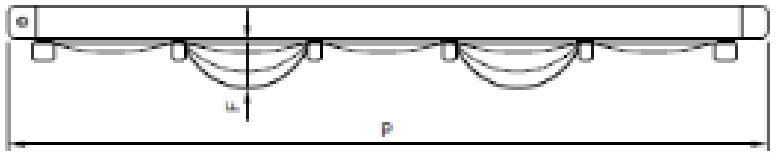

<u>OPTION B:</u> Alternating panel slack on both

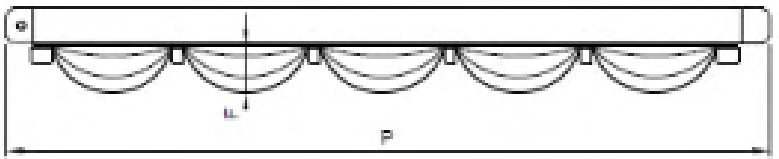

<u>OPTION C:</u> Panels slack on one side only

Solaira™

COSY SERIES

HEATERS COSY SERIES *1500 AW* Sleek, Low clearance, infrared

Sunair® awnings do not specify any particular brand of heaters but we do offer the Solaira brand as a convenience and as "supply" only. As supply only all warranty is per the Manufacturer (Solaira). Please see separate manufacturers installation, use, servicing and warranty documents. Mounting and wiring the heaters on the Pergola units is not included and will be the responsibility of the dealer / customer in the field during installation. Check your local codes for correct wiring instructions. All heaters should be installed by a certified electrician to local state electrical codes. See separate manufacturer's data sheet and wiring instructions. If you purchase your own heaters, make sure that the heater brand and model you chose can be installed within the pergola unit to code. Aluminum Brackets to install the heaters on the awning are sold separately. Note: Sunair® awnings can only make suggestions but will not be responsible or warranty the performance and the effectiveness of the heaters. Check with the manufacturer of the heaters for the recommended number of heaters for your application and best installation position of the heater for best results.

Con't next page

Solaria Heaters con't

Note: Specifier / Customer must contact Solaira directly for recommended heater number and location.

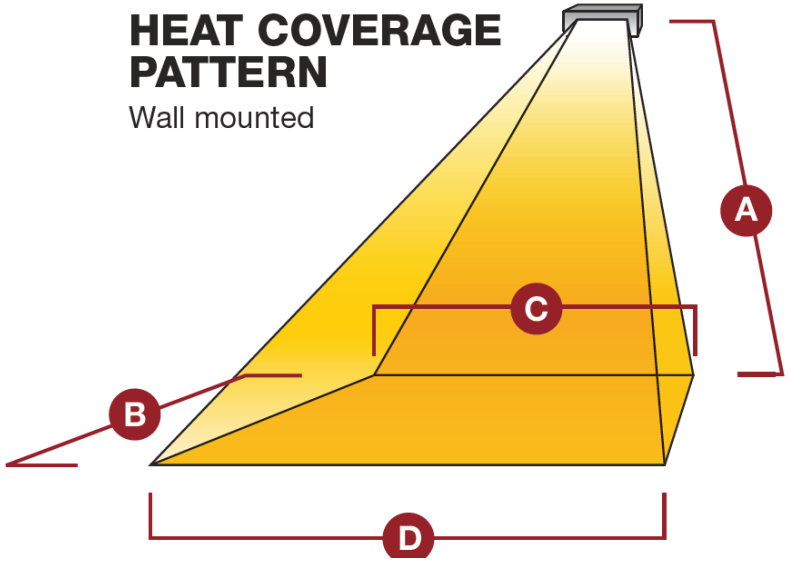

HEAT COVERAGE EXAMPLES

Model	A	B	C	D	Heat Zone*	Heat Density*
SCOSYAW15120 B/W	6´7˝	8´	8´	10´	70 SQ FT	18 WATTS/SQ. FT
SCOSYAW15240 B/W	6´7˝	8´	8´	10´	70 SQ FT	18 WATTS/SQ. FT

* Heat Zone and actual heat density will vary based on mounting height and angle of heater (Overhead mounted heat zones will be different then this guide). Please use this as a guideline only and contact Solaira for a more detailed specifier guide.

*Heat Zone and actual heat density will vary based on mounting height and angle of heater (Overhead mounted zones will be different than this guide). Please use this as a guideline only and contact Solaira for a more detailed specifier guide.

Con't next page

Solaria COZY Series Heaters con't

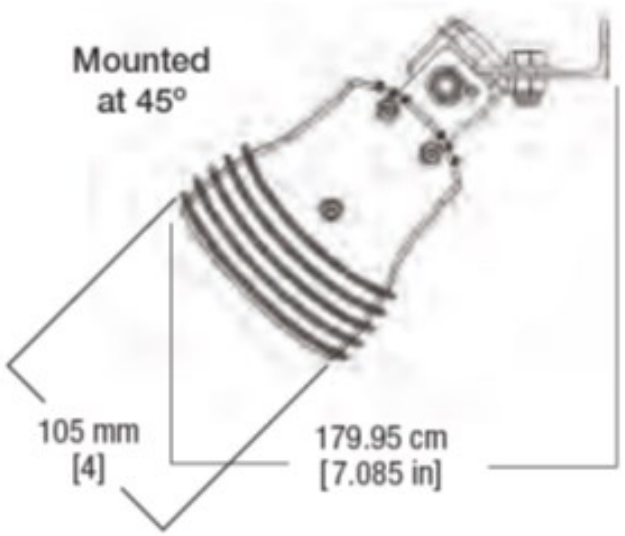

240 VOLT: 1.5Kw 208 - 240 V

Heater Model Black # SCOSYAW15240B Ral:9005

Heater Model White # SCOSYAW15240W Ral:9010

Controller #SPASCR90

One controller will operate up to 12 heaters

110 VOLT: 1.5Kw 120V

Heater Model Black # SCOSYAW15120B Ral: 9005

Heater Model White # SCOSYAW15120W Ral:9010

Controller #SPASCR90

One controller will operate up to 7 heaters

NOTE:

Maximum 7 ea. 110 volt heaters can be used per controller.

Maximum 12 ea. 240 volt heaters can be used per controller.

aura™

INFRARED PATIO HEATER

ADVANCED LOW-LIGHT, LOW-GLARE CARBON FIBER EMITTER TECHNOLOGY

IP65 rated
water resistant

AVAILABLE IN TWO MODELS

CF3000 3000W, 240V

CF1500 1500W, 120V

- Adjustable wall and ceiling mounting brackets included*
- Durable extruded aluminum construction
- Virtually maintenance-free
- Instant heat, warm ambient glow
- Safe and odorless

Includes convenient
remote control

Wall and ceiling
brackets included*

AURA CF3000 Carbon 3000W BLACK 208 - 240 VOLT: **Model # CF302408**
AURA CF1500 Carbon 1500W BLACK 120 VOLT: **Model # CF151208**

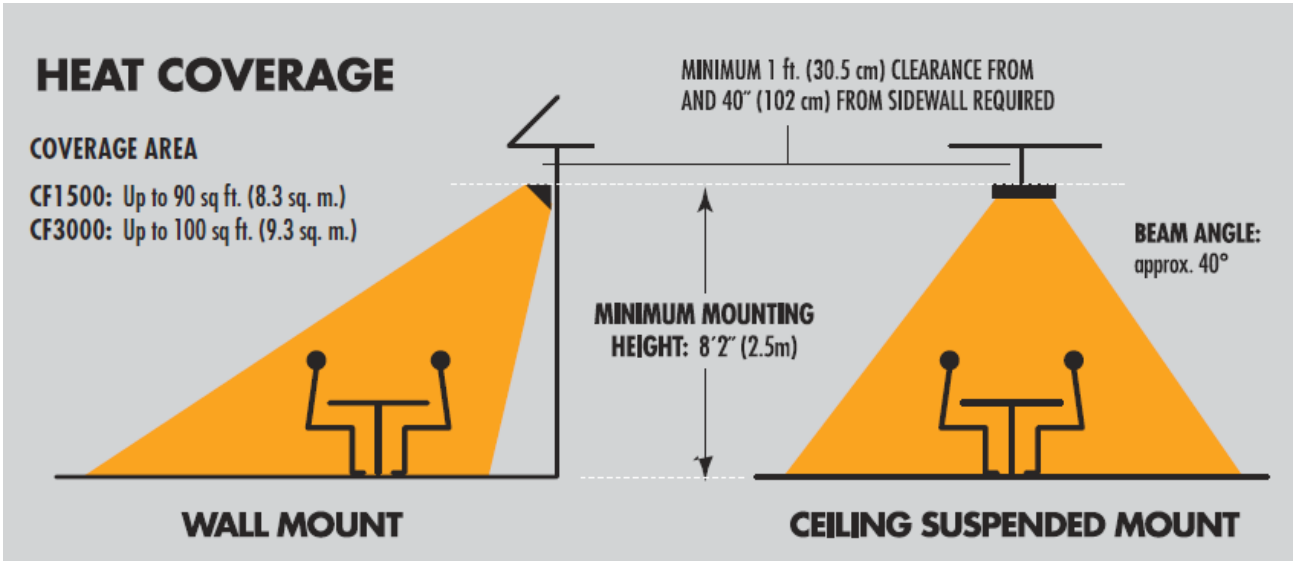

Note:

Specifier / Customer must contact Solaira directly for recommended heater number and location.

*Heat Zone and actual heat density will vary based on mounting height and angle of heater (Overhead mounted zones will be different than this guide). Please use this as a guideline only and contact Solaira for a more detailed specifier guide.

REMOTE CONTROL

RANGE: UP TO 19.5 ft. (6 m)

INCLUDES **ON/OFF** BUTTONS WITH **6 HEAT SETTINGS:**

33% - 50% - 66%
80% - 88% - 100%

REQUIRES 2x AAA, 1, 5V NOT INCLUDED

CF1500

WEIGHT: 10lbs (4.5kgs)

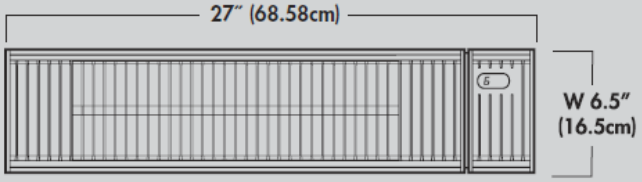

CF3000

WEIGHT: 14.3 lbs. (6.5 kg)

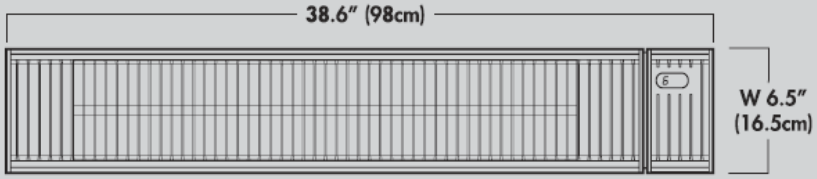

Intertek
C ETL LISTED US

RoHS COMPLIENT

IP65
DUST, RAIN, WATER-JET PROOF
ÉTANCHE À LA POUSSIÈRE, À LA PLUIE ET AUX JETS D'EAU
POLVO, LLUVIA, PRUEBA DE AGUA-JET

* offixing hardware (screws/bolts/wall anchors not included and to be supplied by installer to suit application)

The AURA heaters is a more economical heater that simply plugs in to an outlet (110 volt version). This heater does not require a control box. The remote control is included in the price. Simply aim the remote towards the heater and you can custom set the heat from 1 - 6 on heat scale.

SPECIFICATIONS

EXTRUDED ALUMINUM CONSTRUCTION

INCLUDES: CEILING AND WALL MOUNT BRACKETS*, REMOTE CONTOL, 12 ft. (4.87 m) OF cETLus APPROVED, OUDOOR RATED CABLE

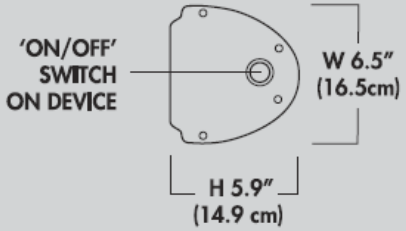

STARLED “Classic” 130 cm / 51” White LED bars

For wall mounted Pergola awnings only (Not for Nomo, Rialto, Opera or Vision).

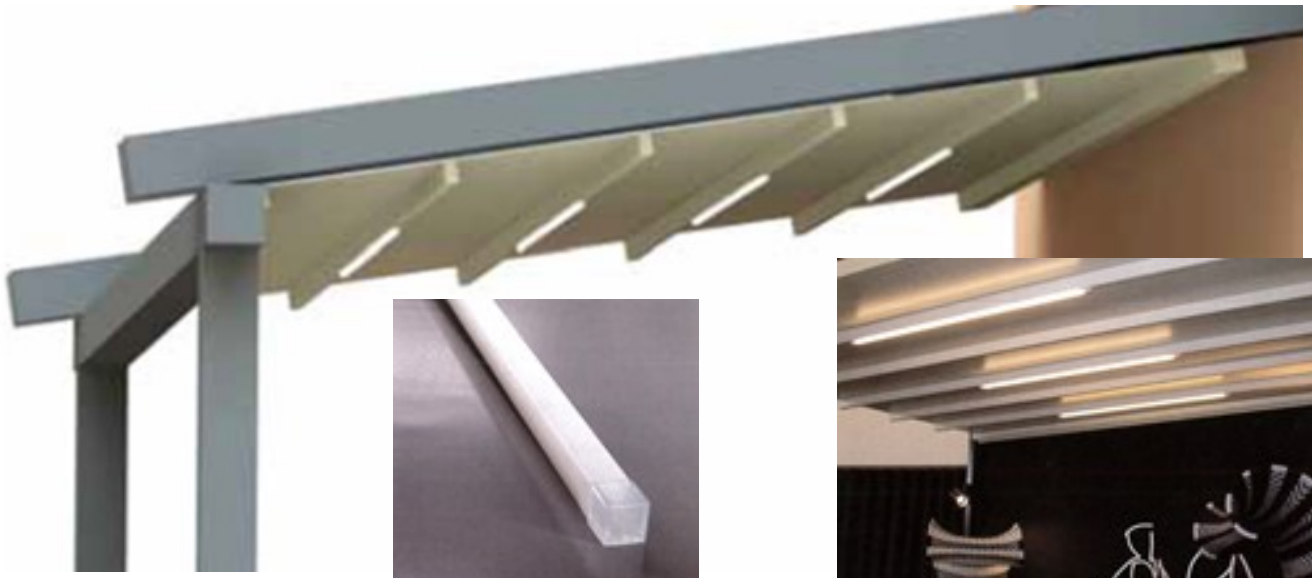



RTS

Radio Technology Somfy

StarLed is the high efficiency led light that allows you to create an intimate, picturesque and bright room under the pergolas

- ✔ Led bar length 130 cm. 140 Led per m., 24 V, PW 14 W
- ✔ Opaline polycarbonate tube 15x15mm
- ✔ Closing caps
- ✔ Installation with screws and adhesive tape 3M
- ✔ Light colour @3000°K
- ✔ Light emission: @1050 lumen
- ✔ High efficiency, warm light Led. Lumen - power ratio is very high, about @110lm/W
- ✔ On request with radio control.

<u>Recommended # of lights:</u> There is no fixed rule how many lights are recommended as it depends on how much light the customer needs. Typically three to four (3 to 4) lights is enough per section of each Pergola or per bay.

LED Soft / White Custom sized LED bars White

For wall mounted Pergola awnings

5MM **ILUMA™** LIGHT STRIPS

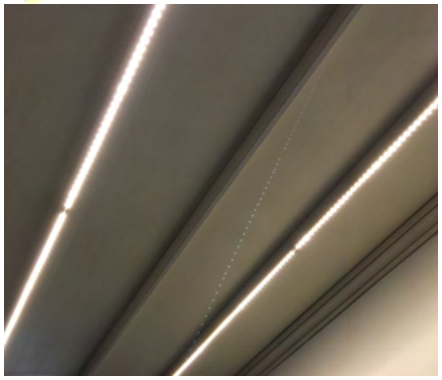

RTS

Radio Technology Somfy

The soft white LED lighting strips are available up to 40 ft long (Maximum allowable amount of linear lighting per Somfy Lighting receiver). One Somfy lighting receiver #1811486 is needed per 40 ft. of linear LED lighting. Typically two to four (2 - 4) lighting bars are centered per each bay or section of Pergola. Multi Channel Telis remotes are needed for the LED lighting depending on how many lighting receivers are needed.

UNDERCOVERS WALL MOUNTED PERGOLA® AWNINGS

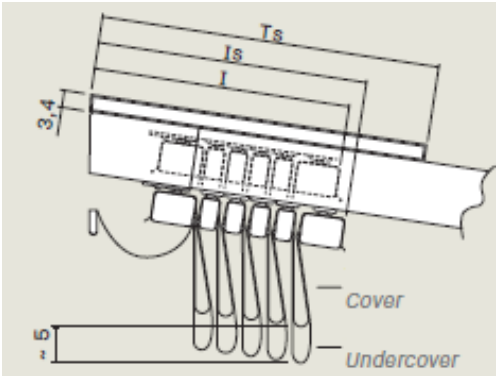

To create a nice atmospheres with wall Pergola® Awnings , it is possible to apply an "Undercover" installed under the ribs. Please note fabric will hang lower than top Vinyl cover. This undercover will be slightly narrower than the top cover by at least 4" / 10 cm per side to prevent water from going up along the PVC flap and wet the fabric of the under cover (Solid 60" fabric colors only).

AVAILABLE FABRICS:

Standard: **Sunbrella 60" solid colors.**

Optional:

Fire retardant Sunbrella & Tempotest STAR 60" solid colors from range.

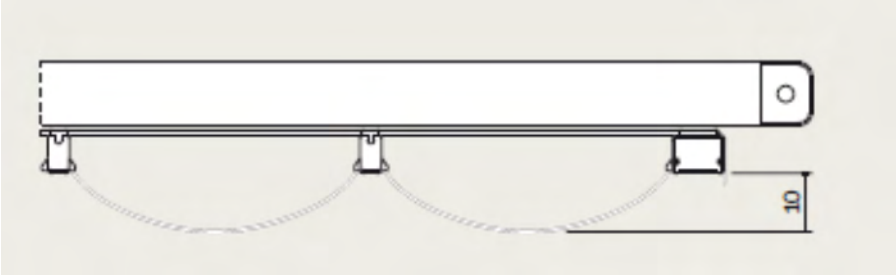

PLease note rib spacing will increase 6mm / 5/16" between each fold in the fabric.



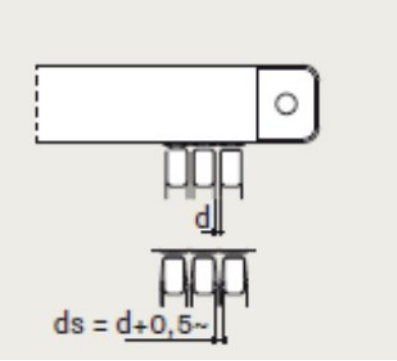

Note: Undercovers are installed with a "clip" system.

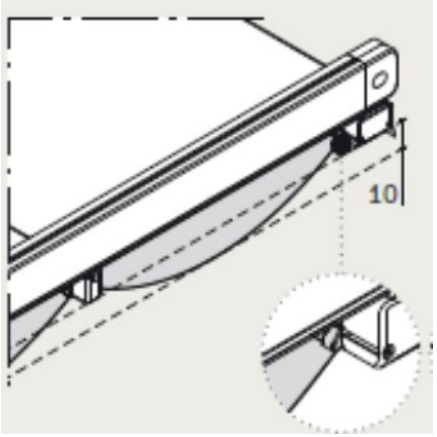

UP & DOWN Glass Walls Options

Up

Down

The Up & Down model is made up of two sections, one stationary and one mobile. A simple key is used to lock and release the module. To raise, release window with the key and the spring loaded module will slowly rise on its own.

The Up and Down model of our glass window dividers can be customized to match your color scheme or even display your logo! The base aluminum colors are White and Iron Grey colors. Virtually any color and design graphic motifs can be added to the glass to showcase your restaurant's unique style. Other models are also available.

Installations

SLIDE GLASS Options

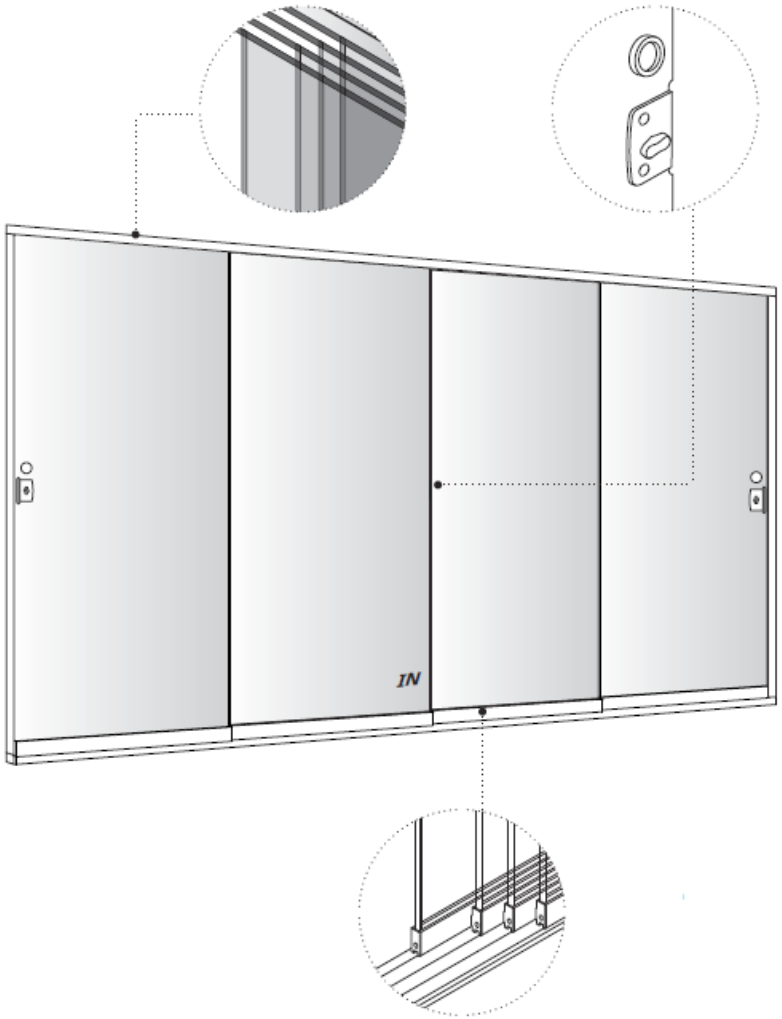

NOTES:

Note: Sunair® reserves the right to change engineering, specifications and prices without notice. Images and Illustrations in the catalog may vary from digital and printed manuals. Sunair® is not responsible for printed inaccuracies in this manual.

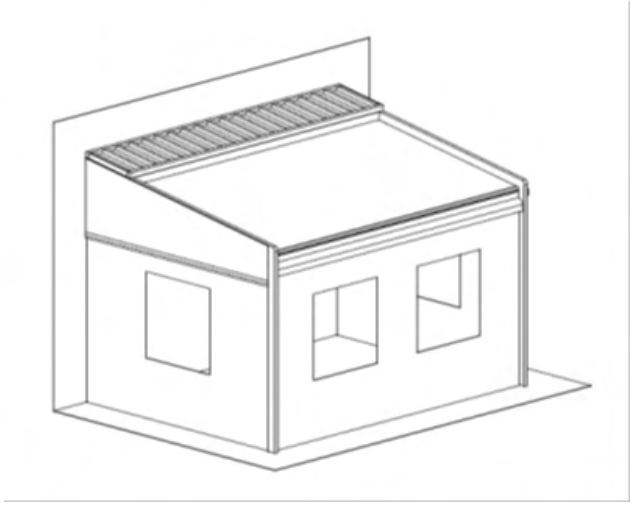

SUNAIR®
ARCHITECTURAL STRUCTURES

SUNPROOFING AMERICA!

MARYLAND LOCATION

Mailing: P.O. Box 1068
Shipping: 7785 Rt. 175
Jessup, MD 20794

Toll Free	800 - 548 - 0408
Phone:	410 - 799 - 1145
Fax:	410 - 799 - 5584

ARIZONA LOCATION

Mailing: Same as Jessup
Shipping: 3807 West Thomas Rd.
Phoenix, AZ 85017

Toll Free	877 - 272 - 3920
Phone:	602 - 272 - 3920
Fax:	602 - 272 - 3925

www.sunairawnings.com info@sunairawnings.com